54▸▸21

LPG GROUP



Data sheet

Maximum operating pressure	25 Bar
Static Test	40 Bar
Dynamic test	25 Bar
Maximum flow rate	40 l/min a 8 Bar
Release of gas when breaked	0,5 cm³
Operating temperature	-30°C - +65°C
Weight	0,80 Kg
Swivel connestion	3/4NPT
Sleeve made of anti-spark material	
Antistatic body and plastic materials	

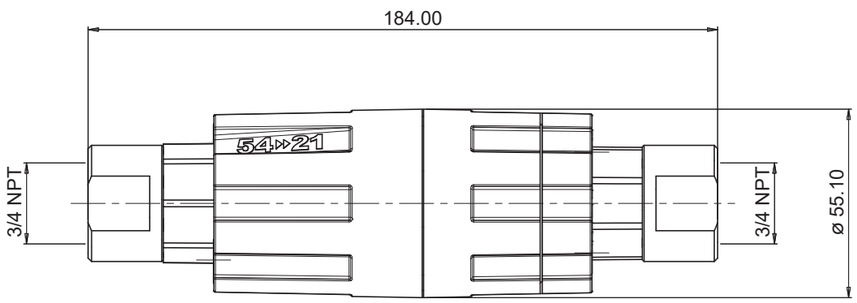

LPG GROUP

EN

5421 PULLAWAY

LPG GROUP SRL Via Rinascita, 38, Ozzano dell'Emilia (BO) Italy
T. +39.051.652 2059 _ www.lpggroup.eu

5421 PULLAWAY

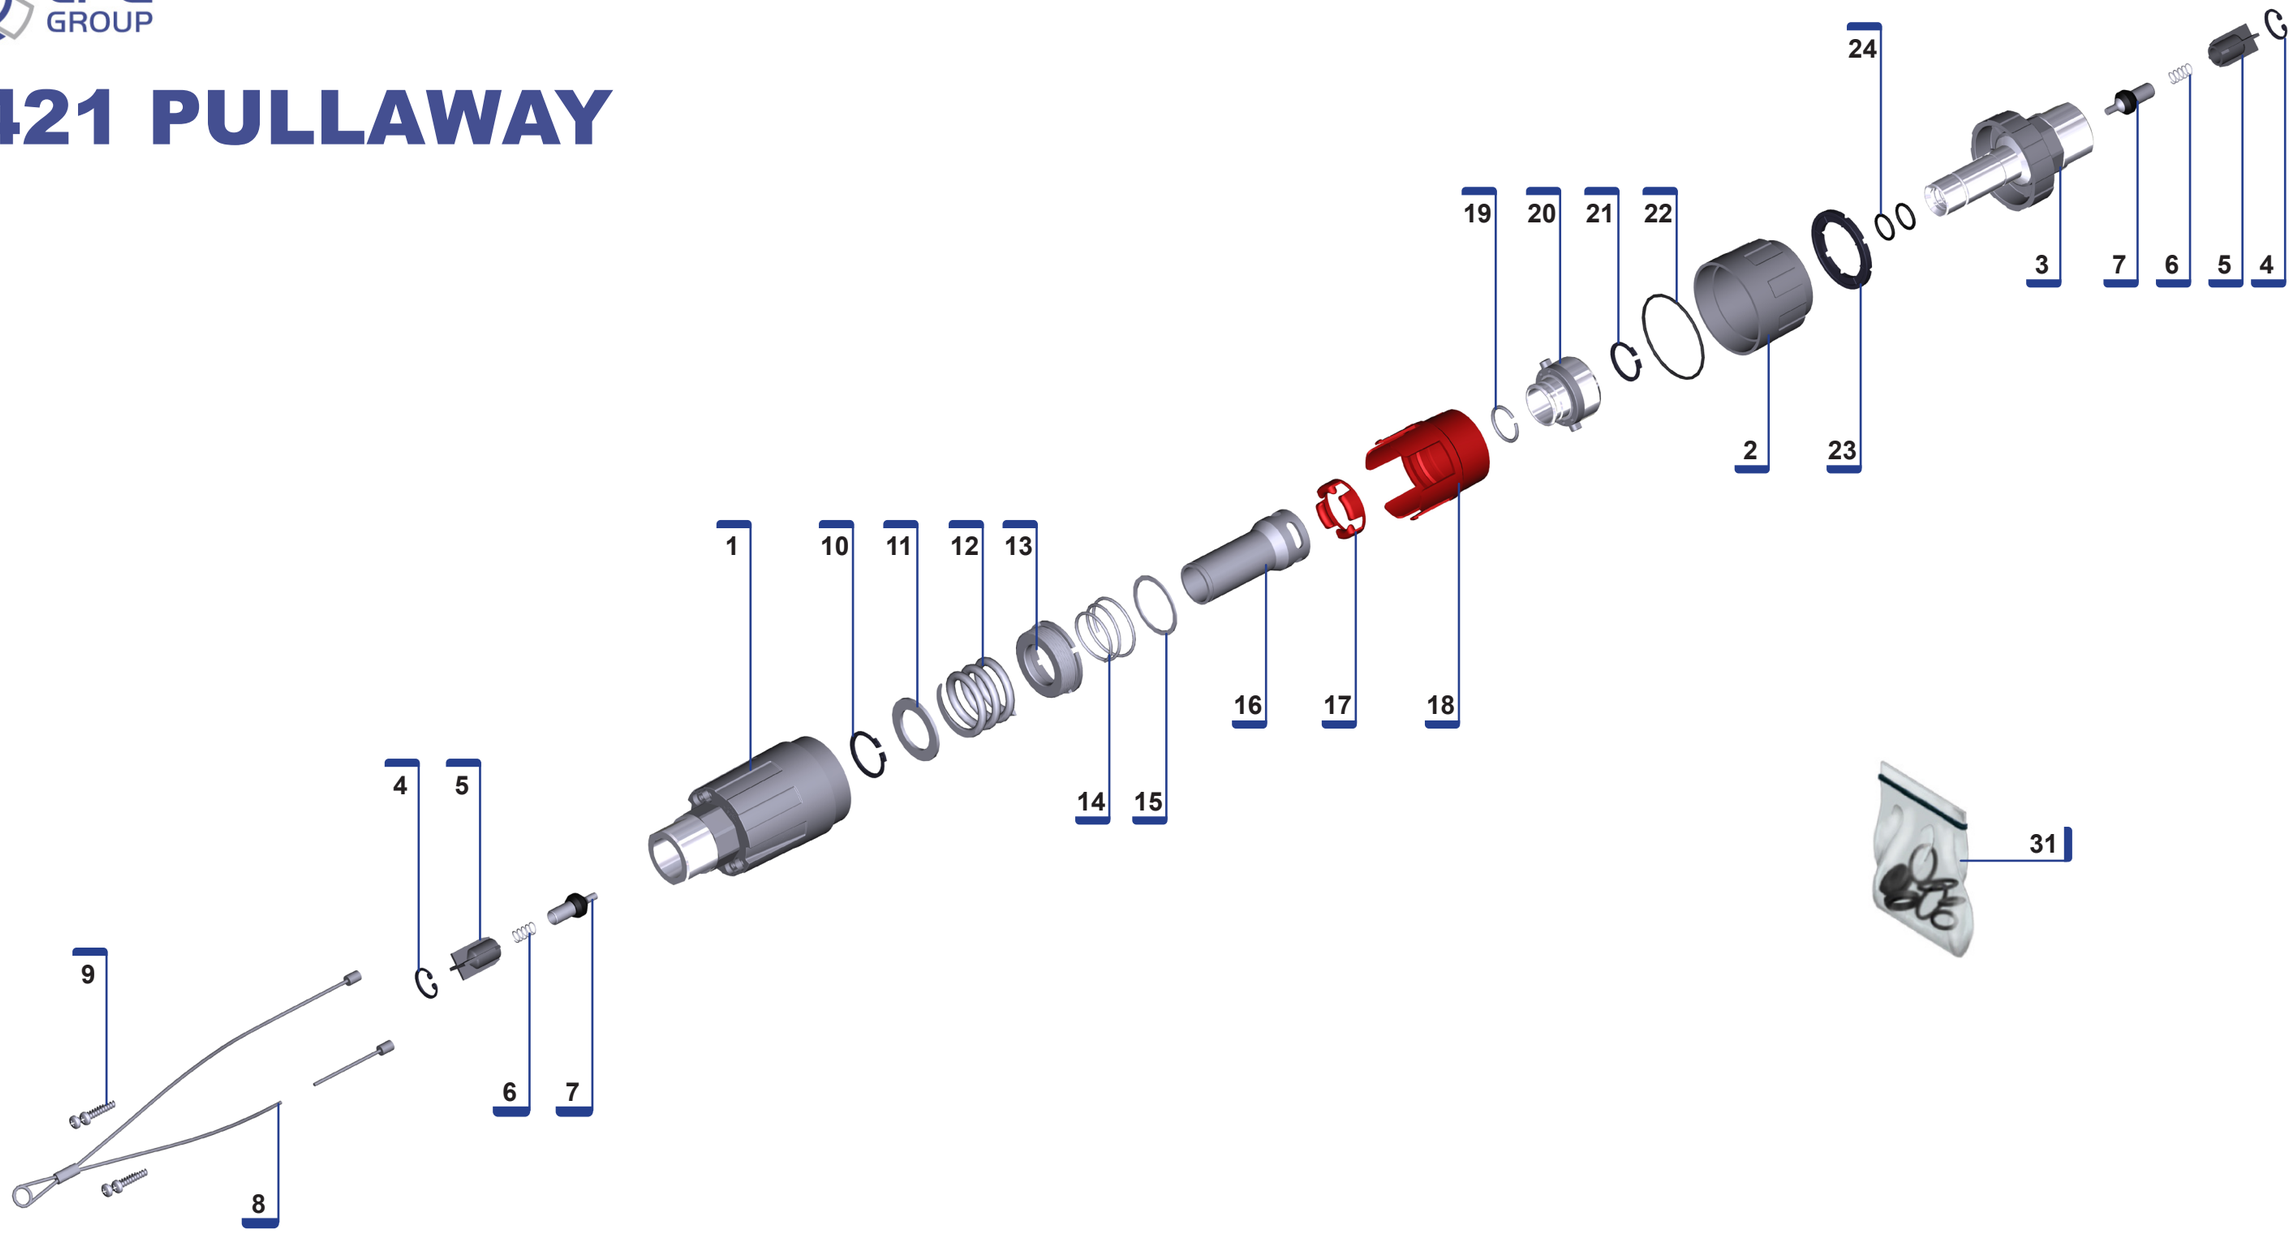

N.	Description	Code	Qt.
1	FIXED BODY	5421_721	1
2	STOP FERRULE	5421_734	1
3	MOVABLE BODY	5421_731	1
4	SEEGER UNI 7437-17	5421_351	2
5	VALVE SUPPORT	5421_747	2
6	VALVE SPRING	5421_749	2
7	VALVE	5421_746	2

N.	Description	Code	Qt.
8	FASTENING CABLE	5421_760	1
9	SCREW	5421_321	4
10	SEEGER UNI 7435-24	5421_354	1
11	SPRING WASHER	5421_728	1
12	CALIBRATE SPRING	5421_741	1
13	SPRING FERRULE	5421_730	1
14	RETURN BUSH SPRING	5421_727	1

N.	Description	Code	Qt.
15	SPRING WASHER	5421_735	1
16	RETENTION BUSH	5421_726	1
17	BLOCKING RING	5421_729	1
18	HOOKING BUSH	5421_725	1
19	RING UNI 7433-A-20	5421_352	1
20	BLOCKING BUSH	5421_737	1
21	SEEGER UNI 7435-20	5421_353	1

N.	Description	Code	Qt.
22	O-RING 2187	5421_340	1
23	ANTI-UNSCREWING RUBBER	5421_751	1
24	O-RING 2050	5421_339	2
31	GASKET KIT PULLAWAY	5421_346	1